




主轴静载  
Static Load

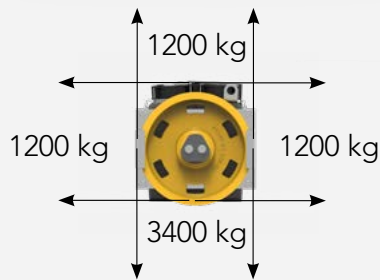

自重  
Weight

175 kg

额定扭矩 <b>Nominal Torque</b>	极数 <b>Poles</b>	编码器 <b>Encoder</b>
<b>Nm</b>		
<b>385 S5 - 40% ED 180 s/h</b>	16	ERN1387 ECN1313 EI53C9.25 TS5213N2531
制动器 <b>Brake</b>		
EMFS DC110V/2X0.9A [2X400Nm]		


 曳引轮直径 ØD		绳槽 Ropes			尺寸 Dimensions			
		宽度 F	绳径 Ø	绳槽数 n°	槽距 Pitch	A	B	C
mm		mm	max	mm	mm	mm	mm	mm
240	105	6,5	10	9,5	562	262	344	74
320	79	8	5	12		342	362	

1 - 数据如有更改，恕不另行通知

1 - Data are subject to change without prior notice.

2 - 我们能够提供带电源线和不带电源线两种配置的机器

2 - We are able to offer machines with and without power cable configurations.

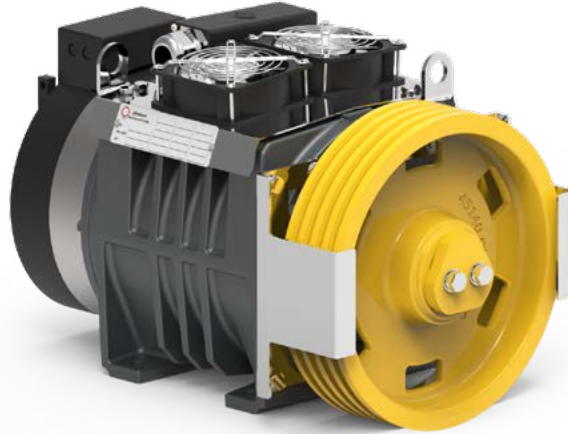

额定载重 Load		Ø	绳槽 Ropes	槽距 Pitch	额定扭矩 Torque	额定功率 Power	额定转速 RPM	额定频率 Freq.	额定电流	额定电流
									Current 220V	Current 380V
kg	m/s	mm	max	mm	Nm	kW	RPM	Hz	A	A
450	1,00	320	5xØ8	12	229	2,86	119	15,9	16,0	7,6
	0,63	320	5xØ8	12	279	2,20	75	10,0	19,6	9,3
550	1,00	320	5xØ8	12	279	3,49	119	15,9	19,6	9,3
	1,50	320	5xØ8	12	279	5,24	179	23,9	29,4	13,4
	1,75	320	5xØ8	12	279	6,11	209	27,9	25,4	14,2
	2,00	320	5xØ8	12	279	6,98	239	31,8	37,9	19,6
	2,50	320	5xØ8	12	279	8,73	298	39,8	37,9	25,4
	0,63	320	5xØ8	12	320	2,52	75	10,0	22,4	10,7
630	1,00	320	5xØ8	12	320	4,00	119	15,9	22,4	10,7
	1,50	320	5xØ8	12	320	6,22	179	23,9	33,8	15,3
	1,75	320	5xØ8	12	320	7,00	209	27,9	33,7	16,2
	2,00	320	5xØ8	12	320	8,00	239	31,8	43,4	22,4
	2,50	320	5xØ8	12	320	10,00	298	39,8	43,4	29,1
800	0,63	240	10xØ6.5	9,5	305	3,20	100	13,4	32,1	14,6
	1,00	240	10xØ6.5	9,5	305	5,08	159	21,2	32,1	14,6
	1,50	240	10xØ6.5	9,5	305	7,62	239	31,8	41,3	21,4
	1,75	240	10xØ6.5	9,5	305	8,89	279	37,1	41,3	21,4
	2,00	240	10xØ6.5	9,5	305	10,16	318	42,4	41,3	27,7

