


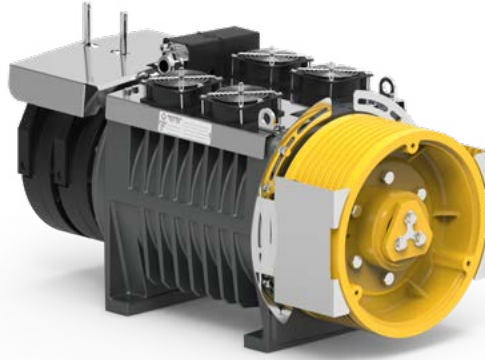
主轴静载
Static Load

自重
Weight | 623 kg

额定扭矩 Nominal Torque	极数 Poles	编码器 Encoder
Nm		
1400 S5 - 40% ED 180 s/h	16	ERN1387 ECN1313 EI53C9.25 TS5213N2531
制动器 Brake		
EMFR1400 DC110V/2X2.03A[2X1400Nm]		

		绳槽 Ropes			尺寸 Dimensions
曳引轮直径 ØD	宽度 F	绳径 Ø	绳槽数 n°	槽距 Pitch	A
mm	mm	mm	max	mm	mm
320	180	8	10	17	153
400		10			

- 1 - 数据如有更改，恕不另行通知
1 - Data are subject to change without prior notice.
2 - 我们能够提供带电源线和不带电源线两种配置的机器
2 - We are able to offer machines with both power cable and no power cable configurations.



2:1	额定载重	额定速度	∅	绳槽	槽距	额定扭矩	额定功率	额定转速	额定频率	额定电流
	Load	Speed	mm	Ropes	Pitch	Torque	Power	RPM	Freq.	Current 380V
	kg	m/s	mm	max	mm	Nm	kW	RPM	Hz	A
2000	0,63	320	10x∅8	17	997	7,9	75	10,0	25,6	
	0,63	400	10x∅10	17	1246	7,8	60	8,0	20,9	
	1,0	320	10x∅8	17	997	12,5	119	15,9	28,5	
	1,0	400	10x∅10	17	1246	12,5	95	12,7	32,1	
	1,6	320	10x∅8	17	997	19,9	191	25,5	41,3	
	1,6	400	10x∅10	17	1246	19,9	153	20,4	51,6	
	2,0	320	10x∅8	17	997	24,9	239	31,8	51,3	
	2,0	400	10x∅10	17	1246	24,9	191	25,5	51,6	
	2,5	320	10x∅8	17	997	31,2	298	39,8	68,4	
	2,5	400	10x∅10	17	1246	31,2	239	31,8	64,1	
2500	3	400	10x∅10	17	1246	37,4	286	38,2	85,5	
	0,63	320	10x∅8	17	1228	9,7	75	10,0	31,6	
	1	320	10x∅8	17	1228	15,4	119	15,9	35,1	
	1,6	320	10x∅8	17	1228	24,6	191	25,5	50,9	
	2	320	10x∅8	17	1228	30,7	239	31,8	63,2	
	2,5	320	10x∅8	17	1228	38,4	298	39,8	84,2	

