


自重  
Weight | 472 kg

额定扭矩 <b>Nominal Torque</b>	极数 <b>Poles</b>	编码器 <b>Encoder</b>
<b>Nm</b>		
<b>850</b> <b>S5 - 40% ED</b> <b>180 s/h</b>	16	ERN1387 ECN1313 EI53C9.25 TS5213N2531
制动器 <b>Brake</b>		
EMFR1400 DC110V/2X2.03A[2X1400Nm]		

曳引轮直径 ØD		绳槽 Ropes			尺寸 Dimensions
		宽度 F	绳径 Ø	绳槽数 n°	槽距 Pitch
mm	mm	mm	max	mm	mm
320	180	8	10	17	153
400		10			

1 - 数据如有更改，恕不另行通知  
1 - Data are subject to change without prior notice.  
2 - 我们能够提供带电源线和不带电源线两种配置的机器  
2 - We are able to offer machines with both power cable and no power cable configurations.

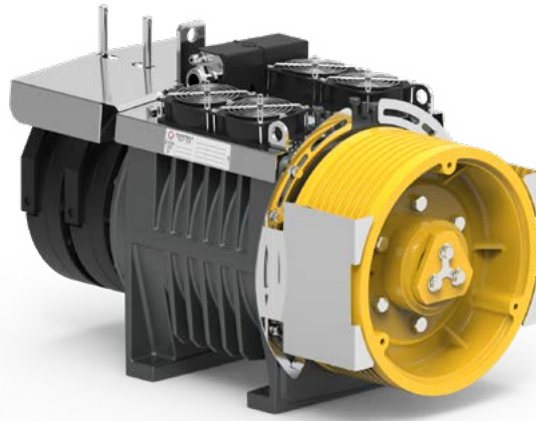

2:1	额定载重 Load	额定速度 Speed	∅	绳槽 Ropes	槽距 Pitch	额定扭矩 Torque	额定功率 Power	额定转速 RPM	额定频率 Freq.	额定电流 Current 380V
	kg	m/s	mm	max	mm	Nm	kW	RPM	Hz	A
1350	0,63	400	400	10x∅10	17	885	5,6	60	8,0	18,2
	1,0	400	400	10x∅10	17	885	8,9	95	12,7	25,6
	1,6	400	400	10x∅10	17	885	14,2	153	20,4	44,3
	2,0	400	400	10x∅10	17	885	17,7	191	25,5	44,3
	2,5	400	400	10x∅10	17	885	22,1	239	31,8	59,0
1600	0,63	320	320	10x∅8	17	812	6,4	75	10,0	22,9
	1,0	320	320	10x∅8	17	812	10,2	119	15,9	26,7
	1,6	320	320	10x∅8	17	812	16,2	191	25,5	41,1
	2,0	320	320	10x∅8	17	812	20,3	239	31,8	41,1
	2,5	320	320	10x∅8	17	812	25,4	298	39,8	55,4

